



5. Barge boards & finials

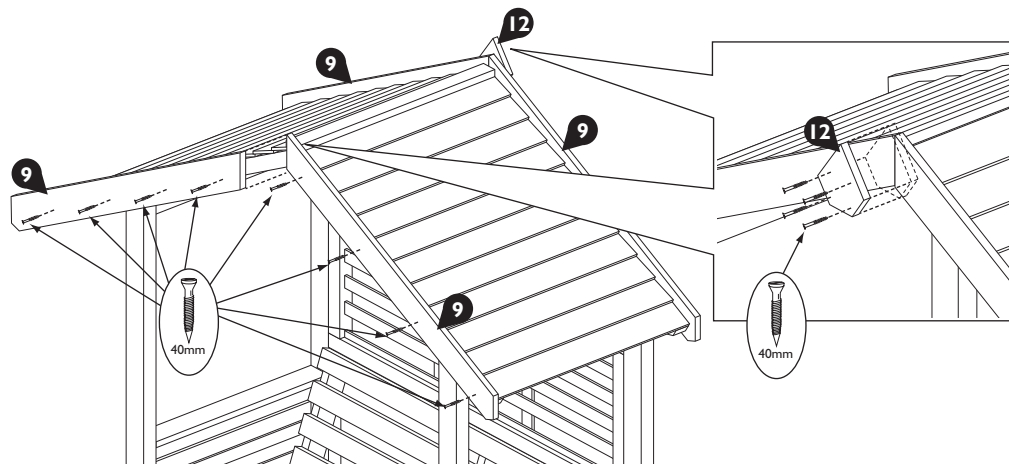

6. Armrests

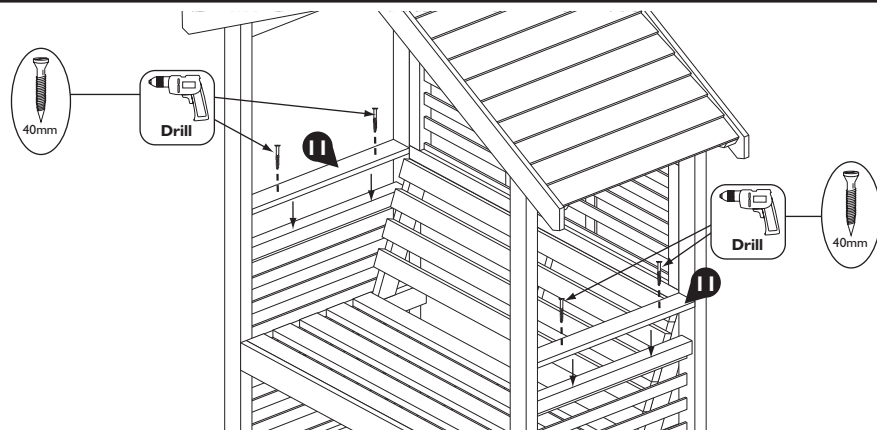

Safety information

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

Periodically check all fastenings for tightness

For domestic use only

If in doubt of any aspect regarding the assembly, use or safety of your arbour please contact us:

Help Line: (Normal Office Hours) 01829 261 121

Email: support@rowgar.co.uk

ROWLINSON GARDEN PRODUCTS LIMITED
Green Lane
Wardle Nr. Nantwich
Cheshire
CW5 6BN
www.rowgar.co.uk

We constantly improve the quality of our products, occasionally the components may differ from the components shown and are only correct at time of printing. We reserve the right to change the specification of our products without prior notice.

2022 © Rowlinson Garden Products Ltd



Aston Arbour

Assembly Instructions


Before assembly

- We recommend that time is taken to read the instructions before starting assembly, then follow the easy step by step guide. The instruction sheet is only a guide to the assembly. Certain items may not be shown to scale.
- Check all components prior to assembly
- This product should be assembled by no less than two people.
- Never attempt to erect the assembly in high winds.
- Drill all components where indicated.




Recommended tools for assembly

- Cross head screw driver
- Drill with 2mm diameter drill bit

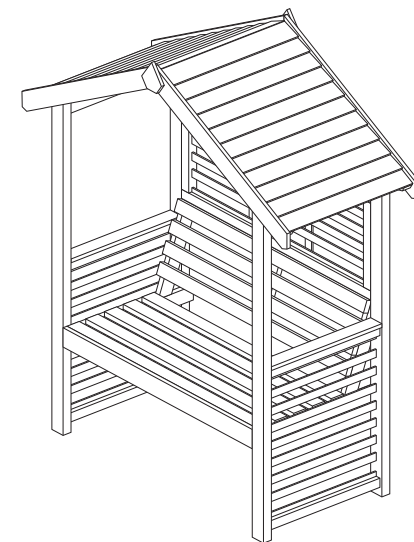

No.	Components	Qty.
1	Upright	2
2	Seat	1
3	Seat centre support (385mm)	1
4	Seat back	1
5	Seat back centre support (320mm)	1
6	Back trellis	1
7	Roof panel	2
8	Roof coverstrip	1
9	Barge board	4
10	Seat front rail	1
11	Arm rest (600mm)	2
12	Finial	2

No.	Fixing kit	Qty.
13	Flat metal brackets	4
14	80mm screws	4
15	60mm screws	16
16	40mm screws	56
17	25mm screws	16

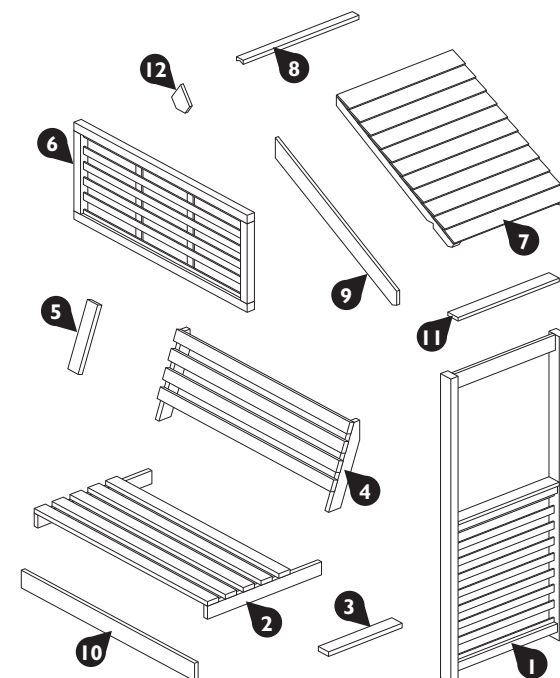

The diagrams illustrate the assembly of the seat base and backrest. The top diagram shows the seat base being attached to the underside of the seat, with a callout indicating that the seat center support must be attached to the underside. The bottom diagram shows the backrest being attached to the seat base, with a callout indicating that the seat center support must be attached to the underside. Both diagrams include instructions for drilling and screwing, with specific dimensions and part numbers provided.